

CHARLEVOIX COUNTY DEPARTMENT OF BUILDING SAFETY DECK SPECIFICATIONS & DETAILS

PLEASE COMPLETE ITEMS ONE THROUGH EIGHT

1. **DECK SIZE:** _____ **X** _____ **OR** _____ **S.F.**
2. **FOOTING SIZE DIAMETER:** _____ **THICKNESS** _____
3. **FOOTING DEPTH BELOW GRADE:** _____
4. **POSTS:** _____ **X** _____ **@** _____ **O.C.**
5. **CARRIER BEAM:**(_____) **EA:** _____ **X** _____
6. **DECK JOISTS:** _____ **X** _____ **@** _____ **O.C.**
7. **DECKING:** _____ **X** _____
8. **GUARDRAIL HEIGHT:** _____

JOIST SPANS

2X6	16" O.C.	9'-9"
	24" O.C.	8'-6"
2X8	16" O.C.	12'-10"
	24" O.C.	11'-3"
2X10	16" O.C.	16'-5"
	24" O.C.	14'-4"


SPAN BETWEEN SUPPORTS ARE BASED ON #2 SOUTHERN YELLOW PINE.

SPACE DECK BOARDS TIGHTLY AS PRESSURE TREATED LUMBER WILL SHRINK AS IT DRIES OUT.

GALVANIZED NAILS AND SCREWS ARE REQUIRED.

NOTE #9: 4" MAX TO EDGES OF SPINDLES REQUIRED WHEN DECK IS 30" OR MORE ABOVE GRADE.

NOTE #10: JOIST HANGERS REQUIRED WHEN HANGING JOISTS OFF BOX HEADER.

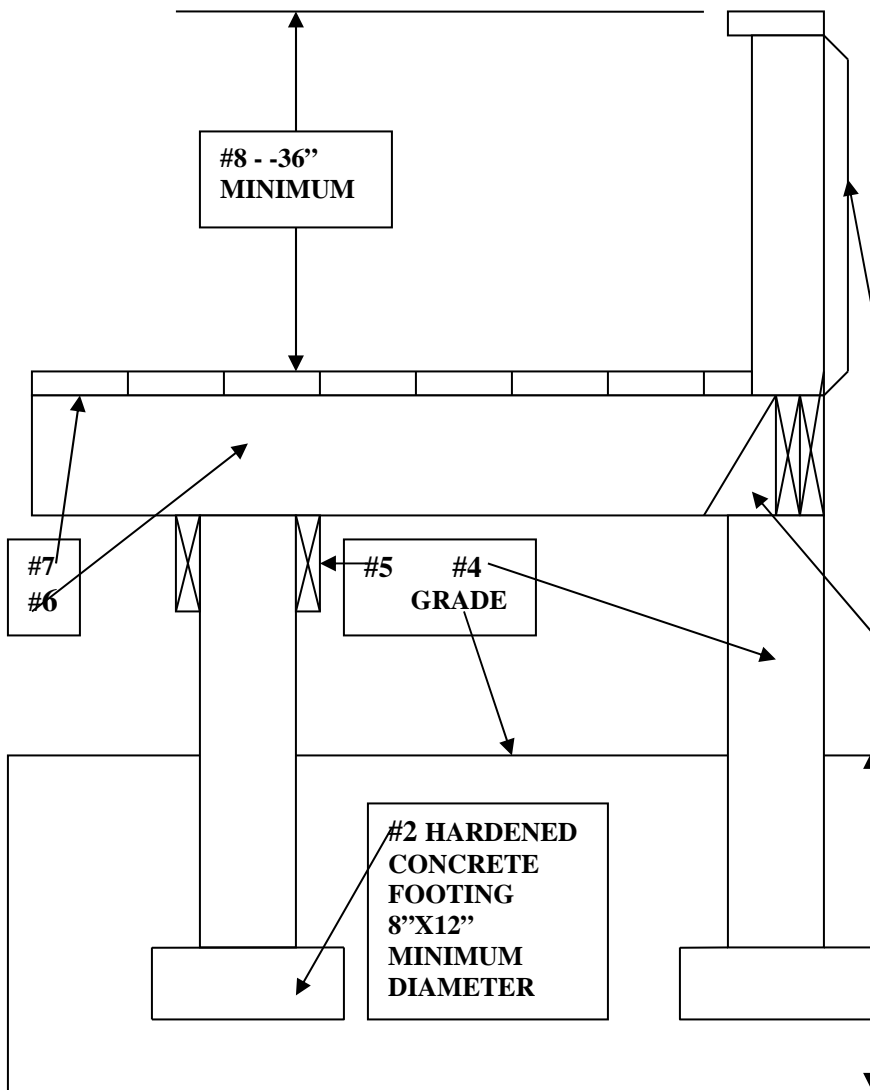

#3
INDICATE DEPTH BELOW GRADE: 32" IN SAND
42" IN CLAY